


Recommended Cleaning & Care

BUZIL-WERK Wagner GmbH & Co. KG

ASPHALT FLOOR COVERINGS

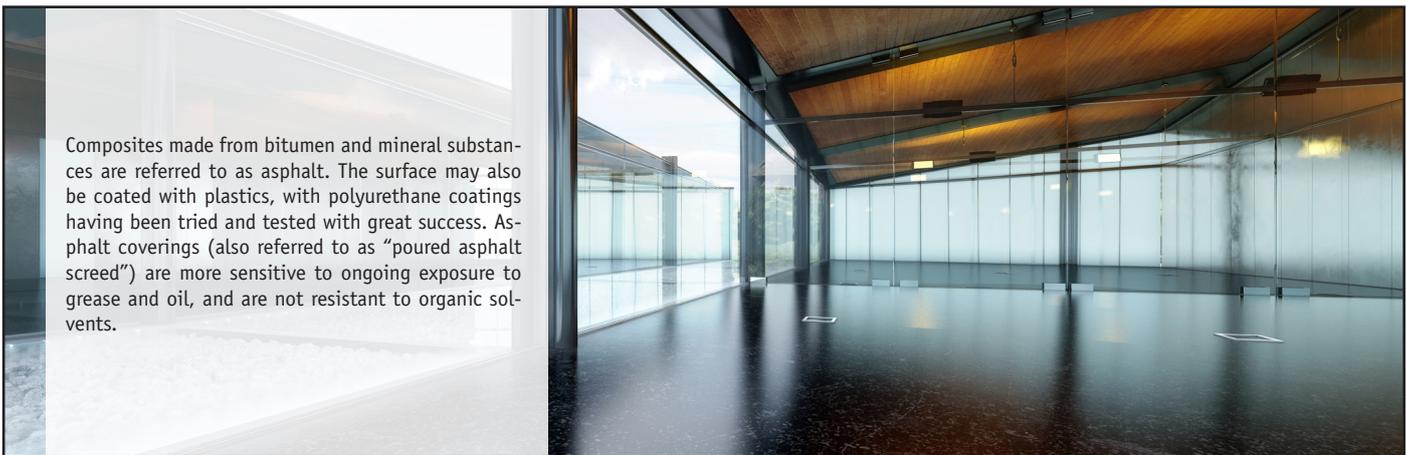

Composites made from bitumen and mineral substances are referred to as asphalt. The surface may also be coated with plastics, with polyurethane coatings having been tried and tested with great success. Asphalt coverings (also referred to as "poured asphalt screed") are more sensitive to ongoing exposure to grease and oil, and are not resistant to organic solvents.

CLEANING

DEEP CLEANING

	Dirt	Treatment	Cleaning device
Pick up loose dirt, and remove any mortar, plaster residue, and colour stains manually using a scraper.	ORGANIC/INORGANIC CONTAMINATION like protein, oil and grease or foodstuff residue e.g. coffee, red wine etc. can be removed using Perfekt G 440. <i>PLEASE NOTE: Check the floor covering for colour-fastness before cleaning!</i>	Apply the cleaning solution evenly over the floor, and leave it to work for approximately 10 to 15 minutes.	
		Deep clean the covering using a single-disc machine and a brush, or a cleaning machine with a brush.	
		Pick up the loosened dirt using a wet vacuum cleaner, and rinse with water.	

INTENSIVE CLEANING

	Dirt	Treatment	Cleaning device
Pick up loose dirt, and remove any mortar, plaster residue, and colour stains manually using a scraper.	HEAVIER DIRT THAT IS ALKALINE-SOLUBLE like protein, oil and grease or foodstuff residue e.g. coffee, red wine etc. can be removed by intensive cleaning using Indumaster® Universal IR 55 or Perfekt G 440 with a two-stage wet mopping method, or mechanically.	Apply the cleaning solution evenly over the floor, and leave it to work for a short time.	
		Clean using a single-disc machine and an appropriate brush.	
		Pick up the loosened dirt using a wet vacuum cleaner, and rinse with water.	

Recommended Cleaning & Care

BUZIL-WERK Wagner GmbH & Co. KG

CONTINUED: CLEANING ASPHALT FLOOR COVERINGS

DAILY ROUTINE CLEANING

	Dirt	Treatment	Cleaning device
Pick up loose dirt	<p>ORGANIC/INORGANIC CONTAMINATION</p> <p>like protein, oil and grease or foodstuff residue e.g. coffee, red wine etc.</p>	In cleaning machines, slightly alkaline cleaners such as Maradin HC 43 and Indumaster® Universal IR 55 are well-suited to daily routine cleaning.	

CARE

INITIAL TREATMENT

Care	Treatment	Cleaning device
<p>If the floor covering is not equipped with a polyurethane coating ex-works, a primer layer using Corridor® Basic S 720 pore filler is advised.</p> <p><i>PLEASE NOTE:</i> Leave the floor covering to dry for at least 8 to 12 hours.</p>	Apply a generous initial layer of Corridor® Basic S 720, diluted 1:1 with water, and leave to dry for approximately 60 minutes.	
	Then apply an additional 1-2 further generous layers of the product, undiluted, leaving each layer to dry completely in turn.	
	Corridor® Basic S 720 is not dissolved during later deep cleaning, and is therefore a permanent primer that only needs to be renewed after some years.	