


Recommended Cleaning & Care

BUZIL-WERK Wagner GmbH & Co. KG

LINOLEUM FLOOR COVERINGS, WITH FACTORY-APPLIED COATING

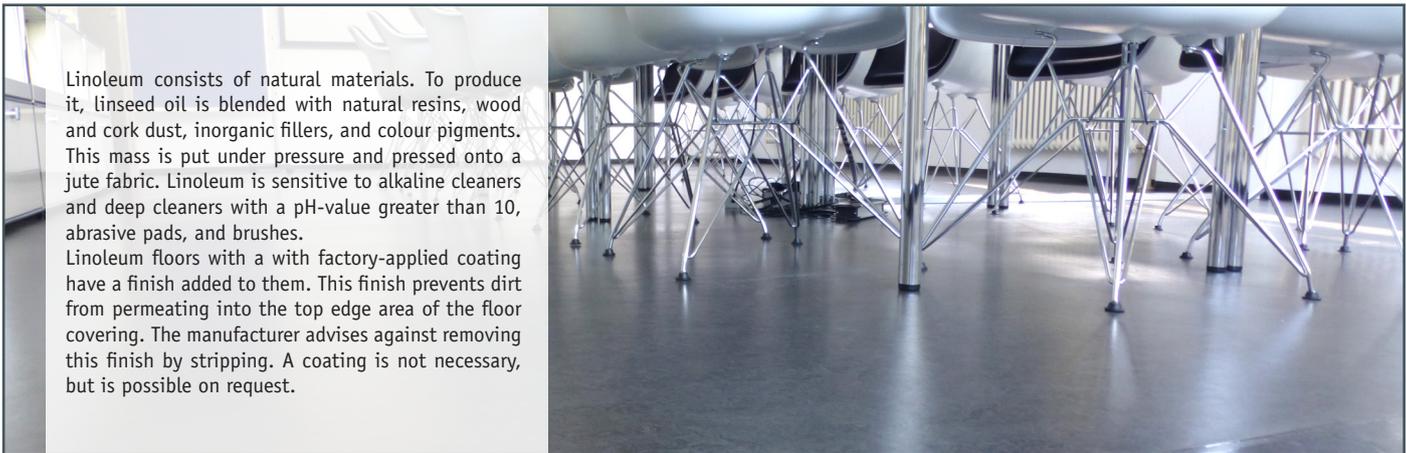

Linoleum consists of natural materials. To produce it, linseed oil is blended with natural resins, wood and cork dust, inorganic fillers, and colour pigments. This mass is put under pressure and pressed onto a jute fabric. Linoleum is sensitive to alkaline cleaners and deep cleaners with a pH-value greater than 10, abrasive pads, and brushes. Linoleum floors with a with factory-applied coating have a finish added to them. This finish prevents dirt from permeating into the top edge area of the floor covering. The manufacturer advises against removing this finish by stripping. A coating is not necessary, but is possible on request.

CLEANING

DEEP CLEANING

	Dirt	Treatment	Cleaning device
Pick up loose dirt, and remove any mortar, plaster residue, and colour stains manually using a scraper.	RESIDUE FROM CARE PRODUCTS	Apply the cleaning solution evenly over the floor, and leave it to work for approximately 10 to 15 minutes. <i>PLEASE NOTE: Do not allow the cleaning solution to dry.</i>	
	in the form of coatings and care products can be removed using Corridor® Unic Ultra S 707, Corridor® Power Stripper S 708 or Planta® Multi Stripper P 321.	Deep clean the covering using a single-disc machine and a blue pad.	
		Pick up the loosened dirt using a wet vacuum cleaner, and rinse with water. <i>PLEASE NOTE: Leave the floor to dry completely before applying a coating (up to 24 hours).</i>	

INTENSIVE CLEANING

	Dirt	Treatment	Cleaning device
Pick up loose dirt, and remove any mortar, plaster residue, and colour stains manually using a scraper.	HEAVIER DIRT THAT IS ALKALINE-SOLUBLE	Apply the cleaning solution evenly over the floor, and leave it to work for a short time.	
	like protein, oil and grease or foodstuff residue e.g. coffee, red wine etc. can be removed by intensive cleaning using Maradin HC 43 using a two-stage wet wiping method, or mechanically.	Clean the covering using a single-disc machine and a red pad.	
		Pick up the loosened dirt using a wet vacuum cleaner, and rinse with water.	

Recommended Cleaning & Care

BUZIL-WERK Wagner GmbH & Co. KG

CONTINUED: CLEANING LINOLEUM FLOOR COVERINGS

DAILY ROUTINE CLEANING

	Dirt	Treatment	Cleaning device
Microfibre cloths or pads must always be used in order to achieve a satisfactory cleaning result.	ORGANIC/INORGANIC CONTAMINATION like protein, oil and grease or foodstuff residue e.g. coffee, red wine etc. Products with a care element, such as the Corridor® Daily S 780, Corridor Cibreeze S790 with odour blocker and Planta® Cleen P315 wipe care products are well-suited to daily routine cleaning.	Manual floor treatment	
	INFECTION PREVENTION	The Buzil Budenat® portfolio surface disinfectant is ideal for defined areas (see Disinfectants).	

CARE

PRIMING

Priming is not necessary/possible due to the finish applied in the factory.

INITIAL TREATMENT

Care	Treatment	Cleaning device
These floor coverings can be used with the extremely durable Corridor® Jewel S 741 high-performance dispersion, offering protection against mechanical damage and improving the appearance of the floor. Alternatively, products such as Corridor® Glorin S 734, Planta® Multi Gloss P 320 (gloss), Corridor® Matt S 737 (silky matt) and Emulsion Corridor® Complete S 732 (gloss) are also well-suited for this purpose.	Apply the dispersion undiluted onto the dry, deep-cleaned floor in two thin layers, leaving each individual layer to dry completely.	
	Polishing is not required.	
Initial treatment with the polymer-based Corridor® Daily S 780, Corridor® Cibreeze S790 or Planta® Cleen P 315 wipe care products is recommended as an alternative way to protect the floor covering.	Wet and wipe the floor covering, and leave it to dry.	 
	Polish the floor covering using a high-speed machine and a suitable pad.	

Recommended Cleaning & Care

BUZIL-WERK Wagner GmbH & Co. KG

CONTINUED: CARING FOR LINOLEUM FLOOR COVERINGS

COATING REPAIR

Care	Treatment	Cleaning device
Pick up loose dirt, and remove any mortar, plaster residue, and colour stains manually using a scraper.	Spray the Maradin HC 43 intensive cleaner onto the surface at the recommended dosage, working on a section at a time.	
	Clean the area using a single-disc machine and a red pad. <i>Replace the pad regularly when doing so.</i>	
	Then wipe the floor covering with water; further rinsing and neutralisation are not necessary.	
	Spray Corridor® Spray S 770 (undiluted) onto the clean surface, working on a section at a time.	
	Use a high-speed machine and a polishing pad to achieve a high gloss floor finish.	