


Recommended Cleaning & Care

BUZIL-WERK Wagner GmbH & Co. KG

SLATE FLOOR COVERINGS

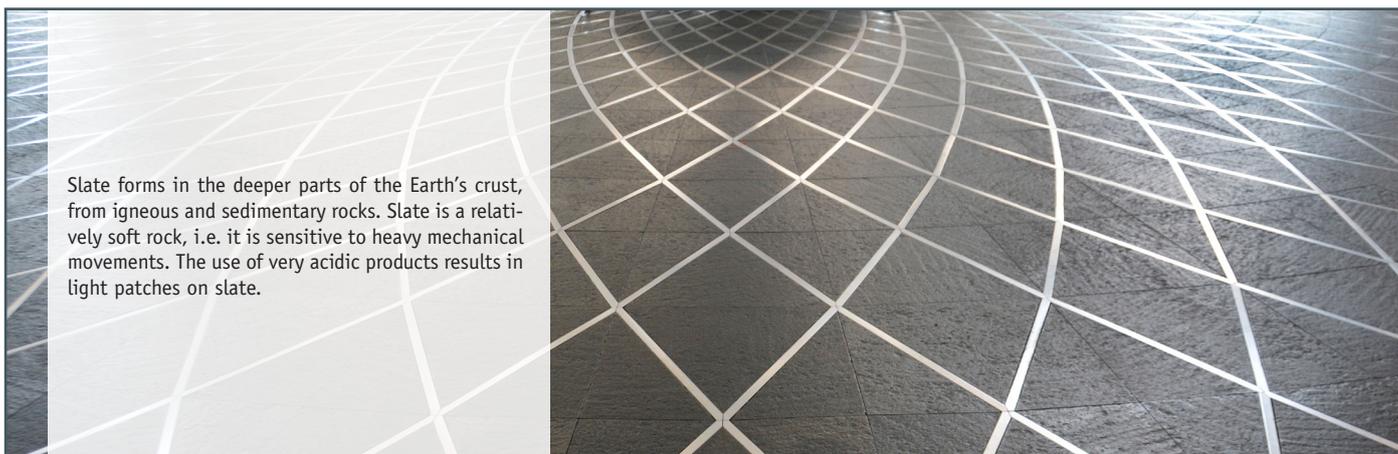

Slate forms in the deeper parts of the Earth's crust, from igneous and sedimentary rocks. Slate is a relatively soft rock, i.e. it is sensitive to heavy mechanical movements. The use of very acidic products results in light patches on slate.

CLEANING

DEEP CLEANING

	Dirt	Treatment	Cleaning device
Pick up loose dirt, and remove mortar, plaster residue, and colour stains manually using a scraper.	LIME DEPOSITS e.g. cement residue in areas with high water hardness, as well as after renovations can be removed using Bucasan® Clear G 463.	Pre-wet the floor covering (important for protecting the cement joints!), and apply the cleaning solution.	
		Deep clean using a single-disc machine and a soft brush.	
		Pick up the loosened dirt using a wet vacuum cleaner, and rinse with water.	
	RESIDUE FROM CARE PRODUCTS in the form of residual coatings can be removed using Corridor® Unic Ultra S 707, Corridor® Power Stripper S 708 or Planta® Multi Stripper P 321.	Apply the cleaning solution evenly over the floor, and leave it to work for approximately 10 to 15 minutes. <i>PLEASE NOTE: Do not allow the cleaning solution to dry.</i>	
		Deep clean the covering using a single-disc machine and a blue pad.	
		Pick up the loosened dirt using a wet vacuum cleaner, and rinse with water.	

Recommended Cleaning & Care

BUZIL-WERK Wagner GmbH & Co. KG

CONTINUED: CLEANING SLATE FLOOR COVERINGS

DEEP CLEANING

	Dirt	Treatment	Cleaning device
Pick up loose dirt, and remove any mortar, plaster residue, and colour stains manually using a scraper.	ORGANIC/INORGANIC CONTAMINATION	Apply the cleaning solution evenly over the floor, and leave it to work for approximately 10 to 15 minutes.	
	e.g. heavy oil, grease and protein deposits or foodstuff residue, e.g. coffee, red wine etc. can be removed using Erol® G 490.	Deep clean the covering using a single-disc machine and a microfibre or active fibre pad.	
		Pick up the loosened dirt using a wet vacuum cleaner, and rinse with water.	

INTENSIVE CLEANING

	Dirt	Treatment	Cleaning device
Pick up loose dirt, and remove any mortar, plaster residue, and colour stains manually using a scraper.	HEAVIER DIRT THAT IS ALKALINE-SOLUBLE	Apply the cleaning solution evenly over the floor, and leave it to work for a short time	
	e.g. heavy oil, grease and protein deposits or foodstuff residue, e.g. coffee, red wine etc. can be removed by intensive cleaning using Maradin HC 43.	Clean using a single-disc machine and a red pad.	
		Pick up the loosened dirt using a wet vacuum cleaner, and rinse with water.	

DAILY ROUTINE CLEANING

	Dirt	Treatment	Cleaning device
Microfibre cloths or pads must always be used in order to achieve a satisfactory cleaning result.	ORGANIC/INORGANIC CONTAMINATION	Soap-based cleaners such as wipe care product Buz® Soap G 240, are well-suited to daily routine cleaning using a damp or wet wiping method, or in cleaning machines with contra-rotating roller brushes or Corridor® Daily S 780, Corridor® Cibreeze Wipe S 790 or Planta® Clean P 315.	

Recommended Cleaning & Care

BUZIL-WERK Wagner GmbH & Co. KG

CONTINUED: CARING FOR SLATE FLOOR COVERINGS

INITIAL TREATMENT

Care	Treatment	Cleaning device
<p>In order to retain slip resistance and the look of the natural stone coverings, they should not be coated, impregnated or subject to initial treatment. However, if it is necessary to apply a coating, Roca Dispers R 200 is a very good option.</p>	<p>This full care agent for stone floors is applied evenly and in undiluted form, in 2-3 thin layers, and each individual layer must be left to dry completely.</p>	
	<p>Polishing is not required.</p>	

IMPREGNATION

Care	Treatment	Cleaning device
<p>To significantly reduce the dirt absorption capacity of the floor covering, it is impregnated with ROCA PREGNO R 100.</p> <p><i>Detailed information on impregnation using the Roca system is available in our "Impregnation" cleaning recommendation. PLEASE NOTE: Impregnation is only possible on non-primed coverings that have also not been subject to initial treatment.</i></p>	<p>Use a flat mop to apply ROCA PREGNO R 100 undiluted, in thin layers.</p>	
	<p>After a drying time of approximately 5 to 10 minutes, remove any excess product that has not yet permeated using a squeegee, and then polish the covering with a soft, absorbent pad (e.g. Coral rosa from Dolly).</p>	